


ATESS Transformer 500kW

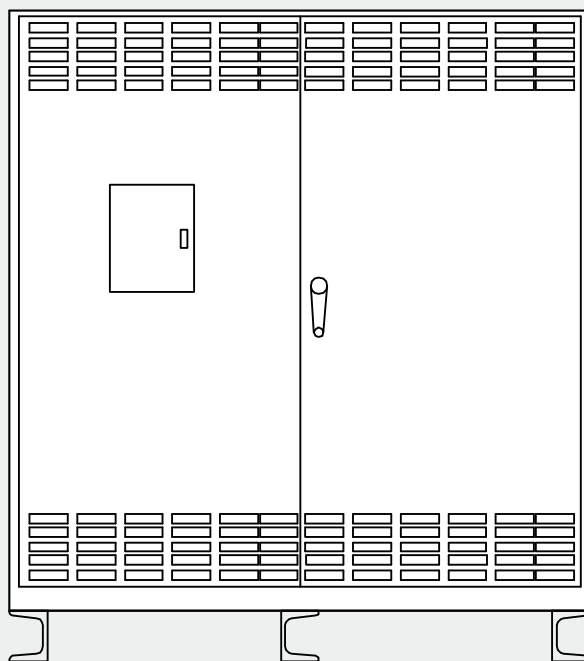

Datasheet

Transformer 500kW

Rated capacity	500kVA
Primary rated voltage	400V
Secondary rated voltage	400V
Primary rated current	722A
Secondary rated current	722A
Rated frequency	50Hz
Vector group	Dyn11
No load consumption	950W
Load consumption	7100W(75°C)
Insulation level	H
Protection level	IP00
Dimension (W/H/D)	1300/1700/1300 mm
Weight	1100kg
Cooling	AF

Shenzhen Ateess Power Technology Co.,Ltd

1st Floor of Building 3 at Sector B and 3rd Floor of Building 9,Henglong Industrial Park, No.4 Industrial Zone, Shuitian Community, Shiyan Street, Baoan District, Shenzhen